


DSEA109 Digital Automatic Voltage Regulator (AVR) with CAN Communications & PMG Support

Part Number: A109-01

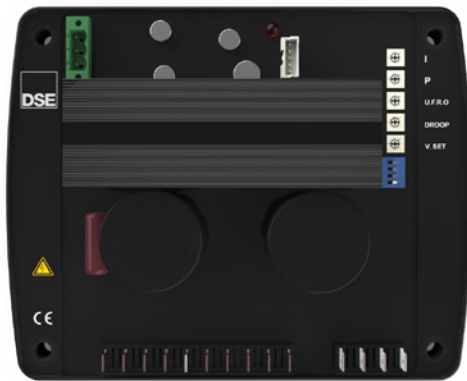

Overview

The DSEA109 Digital Automatic Voltage Regulator (AVR) is designed to regulate the output voltage of an AC generator. The DSEA109 is supplied by either a Permanent Magnet Generator (PMG), stator auxiliary winding or self excited from the generator's main stator windings (shunt).

The DSEA109 eliminates the complexities involved with analogue AVR designs. Analogue AVR designs can be oversensitive to change in temperature which affects the generators output voltage stability, where as the DSEA109 AVR maintains a smooth, stable regulated AC output voltage, regardless of the electrical load connected. The DSEA109 also features 3 phase generator terminal sensing for better regulation.

The DSEA109 is simple to install and set up using the DSE Configuration Suite PC Software with the DSE815 configuration interface. On board DIP switches and potentiometers can be used to further adjust the selected configuration and set points within the AVR at a later date by on site maintenance engineers.

The DSEA109 has numerous advanced features such as a CAN port providing J1939 communications. This allows the AVR to be connected to supported DSE modules to display AVR instrumentation, and send control commands such as voltage adjustment and configuration selection. In addition to this, the DSEA109 also provides a soft start ramping feature, connection for a droop CT and the ability to perform remote voltage set point adjustment. All of these feature make it perfect for synchronising and loadsharing applications.

The DSEA109 AVR is an ideal option for both OEM and retro-fit solutions and is a suitable aftermarket replacement for multiple OEM AVR products. Speak to DSE's dedicated Technical Support team before placing your order to confirm full compatability.

Key Features

- LED indication for fault and operating status
- On board DIP switch selection for 6 configurations and 2 stability ranges
- On board potentiometer adjustment for generator voltage set point, droop percentage, UFRO start frequency, proportional (gain) and integral (stability).
- Remote generator voltage set point adjustment using 5 kΩ potentiometer (with open circuit protection) and/or – 10 V to +10 V DC control signal.
- Compatible with single phase and 3 phase power supply source supplied from a Self Excited (Shunt), Auxiliary Winding or PMG connection.
- Single or 3 phase generator terminal voltage sensing
- Loss of generator terminal voltage sensing protection
- Under Frequency Roll Off (UFRO) protection with optional instantaneous step.
- Over excitation protection
- Optional idle running detection to prevent over excitation
- Soft ramping of generator terminal voltage to set point on start up.
- CAN port providing J1939 communication allowing compatible DSE modules to display AVR instrumentation and send control commands for voltage control and stability/configuration selection.

Product Documentation

053-245 – DSEA109 Installation Instructions

057-295 – DSEA109 Operator Manual

057-294 - DSEA109 Configuration Suite PC Software Manual



DEEP SEA ELECTRONICS UK
T: +44 (0) 1723 890099
E: sales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS USA
T: +1 (815) 316 8706
E: usasales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS UAE
T: +971 (0) 45910819
E: uaesales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS INDIA
T: +91 20 68195900
E: sales@deepseaelectronics.com
W: www.deepseaelectronics.com

Deep Sea Electronics Ltd maintains a policy of continuous development and reserves the right to change the details shown on this data sheet without prior notice. The contents are intended for guidance only.

Registered in England & Wales No.01319649
VAT No.316923457

055-253/06/25 (2)

DSEA109 Digital Automatic Voltage Regulator (AVR) with CAN Communications & PMG Support

Part Number: A109-01

Specifications	
Power Supply	
Supply Source	Self Excited (Shunt), Auxiliary Winding or PMG
Supply Input	Single Phase or 3 Phase
Voltage Range	100 V _{AC} to 270 V _{AC}
Frequency Range	40 Hz to 400 Hz
Generator Terminal Voltage Measurement	
Measurement Input	Single Phase or 3 Phase
Voltage Range	15 V _{AC} to 600 V _{AC} Phase to Neutral or Phase to Phase
Voltage Accuracy	±0.5 %
Frequency Range	40 Hz to 65 Hz
Frequency Accuracy	±0.2 Hz
Drop CT Current Measurement	
Measurement Input	Single Phase
Current Range	0 A to 5 A
VA Rating	0.25 VA
Accuracy	±0.05 A
Droop Adjustment	0 % to 10 %
Remote Bias Inputs	
Number	2
Type	1 Resistive Analogue Input 1 Voltage Analogue Input
Resistive Analogue Input Range	0 Ω to 5 kΩ
Resistive Bias Range	±1 % to ±16 % of Nominal Voltage
Voltage Analogue Input Range	-10 VDC to +10 VDC
Voltage Analogue Input Impedance	Greater than 10 kΩ
Voltage Bias Range	±1 %/V to ±16 %/V of Nominal Voltage
Excitation Output	
Voltage Range	0 V _{DC} to 100 V _{DC} continuous 100 V _{DC} to 150 V _{DC} for 10 seconds
Current Range	0 A _{DC} to 7 A _{DC} continuous 7 A _{DC} to 15 A _{DC} for 10 seconds
Maximum Continuous Output Power	500 W
Exciter Winding Impedance	5 Ω to 50 Ω
Exciter Winding Inductance	0.3 H to 1.2 H

Product Documentation

053-245 – DSEA109 Installation Instructions

057-295 – DSEA109 Operator Manual

057-294 - DSEA109 Configuration Suite PC Software Manual



DEEP SEA ELECTRONICS UK
T: +44 (0) 1723 890099
E: sales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS USA
T: +1 (815) 316 8706
E: usasales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS UAE
T: +971 (0) 45910819
E: uaesales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS INDIA
T: +91 20 68195900
E: sales@deepseaelectronics.com
W: www.deepseaelectronics.com

Deep Sea Electronics Ltd maintains a policy of continuous development and reserves the right to change the details shown on this data sheet without prior notice. The contents are intended for guidance only.

Registered in England & Wales No.01319649
VAT No.316923457

055-253/06/25 (2)

DSEA109 Digital Automatic Voltage Regulator (AVR) with CAN Communications & PMG Support

Part Number: A109-01

Specifications	
Communications	
DSE815 Configuration Port	1 Programming Port
CAN	1 Fully Isolated Port
Temperature	
Operating Temperature	-40 °C to +70 °C / -40 °F to +158 °F
Storage Temperature	-40 °C to +85 °C / -40 °F to +185 °F
Dimensions	
Overall (W x H x D)	180 mm x 145 mm x 61 mm / 7.09 " x 4.72" x 2.40 "
Mounting	
Type	Chassis Mounting
Mounting Holes	4 M5 mounting holes with 150 mm x 120 mm / 5.91 " x 4.72 " centres
Weight	0.62 kg / 1.37 lb

Related Products		
DSEGenset®		
DSEG8900	7" Colour Parallel Genset Controller	G8900-01
DSEG8600	Parallel Genset Controller with Integral Heater	G8600-01
DSE8610 MKII	Synchronising & Load Sharing Auto Start Control Module	8610-02
DSE7420 MKII	Auto Mains (Utility) Failure Control Module	7420-03
DSE7410 MKII	Auto Start Control Module	7410-03
DSE7320 MKII	Auto Mains (Utility) Failure Control Module	7320-03
DSE7310 MKII	Auto Start Control Module	7310-03
Accessories		
DSE815	DSE AVR Communication Interface	0815-01

Product Documentation

053-245 – DSEA109 Installation Instructions

057-295 – DSEA109 Operator Manual

057-294 - DSEA109 Configuration Suite PC Software Manual



DEEP SEA ELECTRONICS UK
T: +44 (0) 1723 890099
E: sales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS USA
T: +1 (815) 316 8706
E: usasales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS UAE
T: +971 (0) 45910819
E: uaesales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS INDIA
T: +91 20 68195900
E: sales@deepseaelectronics.com
W: www.deepseaelectronics.com

Deep Sea Electronics Ltd maintains a policy of continuous development and reserves the right to change the details shown on this data sheet without prior notice. The contents are intended for guidance only.

Registered in England & Wales No.01319649
VAT No.316923457

055-253/06/25 (2)

DSEA109 Digital Automatic Voltage Regulator (AVR) with CAN Communications & PMG Support

Part Number: A109-01

Environmental Testing Standards	
Electro-Magnetic Compatibility	
BS EN 61000-6-2	EMC Generic Immunity Standard for the Industrial Environment
BS EN 61000-6-4	EMC Generic Emission Standard for the Industrial Environment
Electrical Safety	
BS EN 60950	Safety of Information Technology Equipment, including Electrical Business Equipment
Temperature	
BS EN 60068-2-1	Ab/Ae Cold Test -30 °C
BS EN 60068-2-2	Bb/Be Dry Heat +70 °C
Vibration	
BS EN 60068-2-6	Ten sweeps in each of three major axes 5 Hz to 8 Hz at ± 7.5 mm, 8 Hz to 500 Hz at 2 Gn
Humidity	
BS EN 60068-2-30	Db Damp Heat Cyclic 20/55 °C at 95% Relative Humidity 48 Hours
BS EN 60068-2-78	Cab Damp Heat Static 40 °C at 93% Relative Humidity 48 Hours
Shock	
BS EN 60068-2-27	Three shocks in each of three major axes 15 Gn in 11 ms
Degrees of Protection Provided by Enclosures	
BS EN 60529	IP20

Product Documentation

053-245 – DSEA109 Installation Instructions

057-295 – DSEA109 Operator Manual

057-294 – DSEA109 Configuration Suite PC Software Manual



DEEP SEA ELECTRONICS UK
T: +44 (0) 1723 890099
E: sales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS USA
T: +1 (815) 316 8706
E: usasales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS UAE
T: +971 (0) 45910819
E: uaesales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS INDIA
T: +91 20 68195900
E: sales@deepseaelectronics.com
W: www.deepseaelectronics.com

Deep Sea Electronics Ltd maintains a policy of continuous development and reserves the right to change the details shown on this data sheet without prior notice. The contents are intended for guidance only.

Registered in England & Wales No.01319649
VAT No.316923457

055-253/06/25 (2)

DSEA109 Digital Automatic Voltage Regulator (AVR) with CAN Communications & PMG Support

Part Number: A109-01

Pin Out Description	
Pin	Description
U	Self Excited (Shunt), Auxiliary Winding or PMG L1
V	Self Excited (Shunt), Auxiliary Winding or PMG L2/N
W	Self Excited (Shunt), Auxiliary Winding or PMG L3
F+	Exciter Output Positive
F-	Exciter Output Negative
S1	Droop CT S1
S2	Droop CT S2
L1	Generator Terminal L1 Voltage
N (L2)	Generator Terminal L2/N Voltage
L3	Generator Terminal L3 Voltage
P1	0 Ω to 5 k Ω Remote Bias Input
P2	0 Ω to 5 k Ω Remote Bias Input
A+	-10 V to +10 V Remote Bias Input Positive
A-	-10 V to +10 V Remote Bias Input Negative
CAN H	CANbus High
CAN L	CANbus Low
SCR	CANbus Screen

Product Documentation

053-245 – DSEA109 Installation Instructions

057-295 – DSEA109 Operator Manual

057-294 - DSEA109 Configuration Suite PC Software Manual



DEEP SEA ELECTRONICS UK

T: +44 (0) 1723 890099

E: sales@deepseaelectronics.com

W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS USA

T: +1 (815) 316 8706

E: usasales@deepseaelectronics.com

W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS UAE

T: +971 (0) 45910819

E: uaesales@deepseaelectronics.com

W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS INDIA

T: +91 20 68195900


E: sales@deepseaelectronics.com

W: www.deepseaelectronics.com

DSEA109 Digital Automatic Voltage Regulator (AVR) with CAN Communications & PMG Support

Part Number: A109-01

Technical Drawing & Connection label

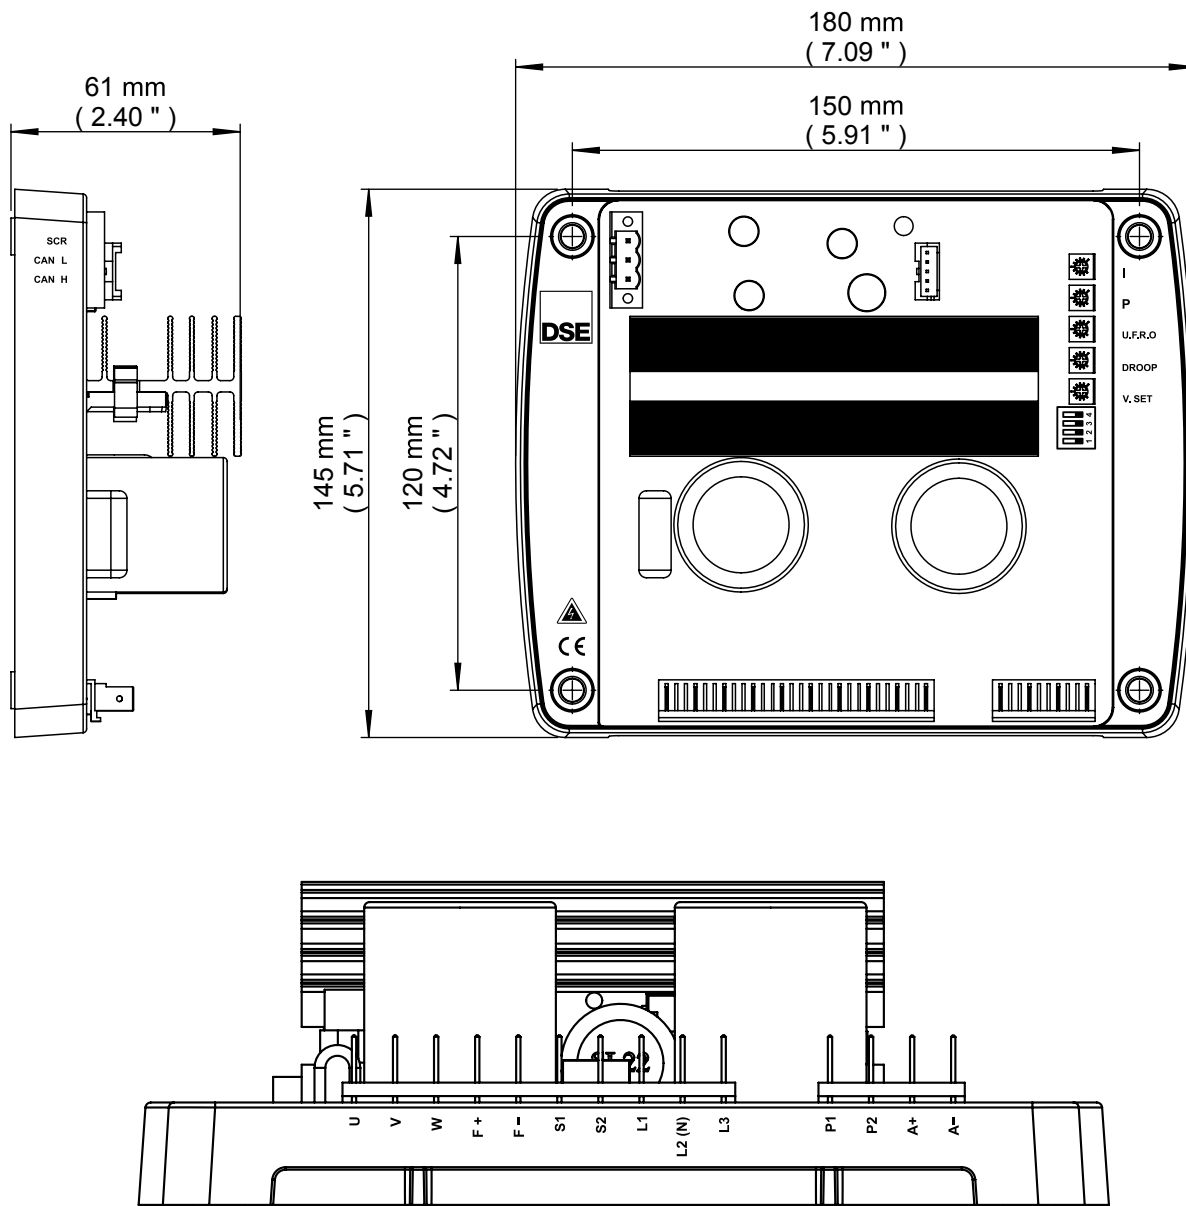

Product Documentation

053-245 – DSEA109 Installation Instructions

057-295 – DSEA109 Operator Manual

057-294 – DSEA109 Configuration Suite PC Software Manual



DEEP SEA ELECTRONICS UK
T: +44 (0) 1723 890099
E: sales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS USA
T: +1 (815) 316 8706
E: usasales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS UAE
T: +971 (0) 45910819
E: uaesales@deepseaelectronics.com
W: www.deepseaelectronics.com

DEEP SEA ELECTRONICS INDIA
T: +91 20 68195900
E: sales@deepseaelectronics.com
W: www.deepseaelectronics.com

Deep Sea Electronics Ltd maintains a policy of continuous development and reserves the right to change the details shown on this data sheet without prior notice. The contents are intended for guidance only.

Registered in England & Wales No.01319649
VAT No.316923457

055-253/06/25 (2)